

[MS-OCSP-Diff]:

Online Certificate Status Protocol (OCSP) Extensions

Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation (“this documentation”) for protocols, file formats, data portability, computer languages, and standards support. Additionally, overview documents cover inter-protocol relationships and interactions.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you can make copies of it in order to develop implementations of the technologies that are described in this documentation and can distribute portions of it in your implementations that use these technologies or in your documentation as necessary to properly document the implementation. You can also distribute in your implementation, with or without modification, any schemas, IDLs, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications documentation.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that might cover your implementations of the technologies described in the Open Specifications documentation. Neither this notice nor Microsoft's delivery of this documentation grants any licenses under those patents or any other Microsoft patents. However, a given Open Specifications document might be covered by the Microsoft [Open Specifications Promise](#) or the [Microsoft Community Promise](#). If you would prefer a written license, or if the technologies described in this documentation are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting iplg@microsoft.com.
- **License Programs.** To see all of the protocols in scope under a specific license program and the associated patents, visit the [Patent Map](#).
- **Trademarks.** The names of companies and products contained in this documentation might be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit www.microsoft.com/trademarks.
- **Fictitious Names.** The example companies, organizations, products, domain names, email addresses, logos, people, places, and events that are depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than as specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications documentation does not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments, you are free to take advantage of them. Certain Open Specifications documents are intended for use in conjunction with publicly available standards specifications and network programming art and, as such, assume that the reader either is familiar with the aforementioned material or has immediate access to it.

Support. For questions and support, please contact dochelp@microsoft.com.

Revision Summary

Date	Revision History	Revision Class	Comments
12/18/2006	0.1	New	Version 0.1 release
3/2/2007	1.0	Major	Version 1.0 release
4/3/2007	1.1	Minor	Version 1.1 release
5/11/2007	1.2	Minor	Version 1.2 release
6/1/2007	1.2.1	Editorial	Changed language and formatting in the technical content.
7/3/2007	1.2.2	Editorial	Changed language and formatting in the technical content.
7/20/2007	1.2.3	Editorial	Changed language and formatting in the technical content.
8/10/2007	1.2.4	Editorial	Changed language and formatting in the technical content.
9/28/2007	1.3	Minor	Added captions to figures.
10/23/2007	1.4	Minor	Clarified the meaning of the technical content.
11/30/2007	2.0	Major	Updated and revised the technical content.
1/25/2008	3.0	Major	Updated and revised the technical content.
3/14/2008	3.0.1	Editorial	Changed language and formatting in the technical content.
5/16/2008	4.0	Major	Updated and revised the technical content.
6/20/2008	5.0	Major	Updated and revised the technical content.
7/25/2008	5.0.1	Editorial	Changed language and formatting in the technical content.
8/29/2008	5.0.2	Editorial	Changed language and formatting in the technical content.
10/24/2008	5.1	Minor	Clarified the meaning of the technical content.
12/5/2008	5.2	Minor	Clarified the meaning of the technical content.
1/16/2009	5.3	Minor	Clarified the meaning of the technical content.
2/27/2009	5.3.1	Editorial	Changed language and formatting in the technical content.
4/10/2009	5.3.2	Editorial	Changed language and formatting in the technical content.
5/22/2009	6.0	Major	Updated and revised the technical content.
7/2/2009	6.0.1	Editorial	Changed language and formatting in the technical content.
8/14/2009	6.0.2	Editorial	Changed language and formatting in the technical content.
9/25/2009	6.1	Minor	Clarified the meaning of the technical content.
11/6/2009	6.1.1	Editorial	Changed language and formatting in the technical content.
12/18/2009	6.2	Minor	Clarified the meaning of the technical content.
1/29/2010	7.0	Major	Updated and revised the technical content.
3/12/2010	7.0.1	Editorial	Changed language and formatting in the technical content.

Date	Revision History	Revision Class	Comments
4/23/2010	7.0.2	Editorial	Changed language and formatting in the technical content.
6/4/2010	7.0.3	Editorial	Changed language and formatting in the technical content.
7/16/2010	7.0.3	None	No changes to the meaning, language, or formatting of the technical content.
8/27/2010	7.0.3	None	No changes to the meaning, language, or formatting of the technical content.
10/8/2010	7.0.3	None	No changes to the meaning, language, or formatting of the technical content.
11/19/2010	8.0	Major	Updated and revised the technical content.
1/7/2011	8.0	None	No changes to the meaning, language, or formatting of the technical content.
2/11/2011	8.0	None	No changes to the meaning, language, or formatting of the technical content.
3/25/2011	8.0	None	No changes to the meaning, language, or formatting of the technical content.
5/6/2011	8.0	None	No changes to the meaning, language, or formatting of the technical content.
6/17/2011	8.1	Minor	Clarified the meaning of the technical content.
9/23/2011	8.1	None	No changes to the meaning, language, or formatting of the technical content.
12/16/2011	9.0	Major	Updated and revised the technical content.
3/30/2012	9.0	None	No changes to the meaning, language, or formatting of the technical content.
7/12/2012	9.0	None	No changes to the meaning, language, or formatting of the technical content.
10/25/2012	10.0	Major	Updated and revised the technical content.
1/31/2013	10.0	None	No changes to the meaning, language, or formatting of the technical content.
8/8/2013	11.0	Major	Updated and revised the technical content.
11/14/2013	11.0	None	No changes to the meaning, language, or formatting of the technical content.
2/13/2014	11.0	None	No changes to the meaning, language, or formatting of the technical content.
5/15/2014	11.0	None	No changes to the meaning, language, or formatting of the technical content.
6/30/2015	12.0	Major	Significantly changed the technical content.
10/16/2015	12.0	None	No changes to the meaning, language, or formatting of the technical content.
7/14/2016	13.0	Major	Significantly changed the technical content.

Date	Revision History	Revision Class	Comments
6/1/2017	13.0	None	No changes to the meaning, language, or formatting of the technical content.
9/15/2017	14.0	Major	Significantly changed the technical content.
9/12/2018	15.0	Major	Significantly changed the technical content.
4/7/2021	16.0	Major	Significantly changed the technical content.
6/25/2021	17.0	Major	Significantly changed the technical content.
12/12/2023	18.0	Major	Significantly changed the technical content.

Table of Contents

1	(Updated Section) Introduction	6
1.1	(Updated Section) Glossary	6
1.2	References	7
1.2.1	(Updated Section) Normative References	7
1.2.2	(Updated Section) Informative References	8
1.3	(Updated Section) Overview	9
1.4	Relationship to Other Protocols	10
1.5	(Updated Section) Prerequisites/Preconditions	10
1.6	(Updated Section) Applicability Statement	10
1.7	Versioning and Capability Negotiation	10
1.8	Vendor-Extensible Fields	10
1.9	Standards Assignments	10
2	Messages	11
2.1	(Updated Section) Transport	11
2.2	(Updated Section) Message Syntax	11
2.2.1	(Updated Section) Common Structures	11
3	Protocol Details	12
3.1	Client Details	12
3.1.1	Abstract Data Model	12
3.1.2	Timers	12
3.1.3	Initialization	12
3.1.4	Higher-Layer Triggered Events	12
3.1.5	Processing Events and Sequencing Rules	12
3.1.6	Timer Events	12
3.1.7	Other Local Events	12
3.2	Server Details	12
3.2.1	(Updated Section) Abstract Data Model	13
3.2.2	Timers	13
3.2.3	Initialization	13
3.2.4	Higher-Layer Triggered Events	13
3.2.5	(Updated Section) Processing Events and Sequencing Rules	13
3.2.6	Timer Events	15
3.2.7	Other Local Events	15
4	Protocol Example	16
5	Security	17
5.1	(Updated Section) Security Considerations for Implementers	17
5.1.1	Keeping Information Secret	17
5.1.2	Coding Practices	17
5.1.3	(Updated Section) Security Consideration Citations	17
5.2	Index of Security Parameters	18
6	(Updated Section) Appendix A: Product Behavior	19
7	Change Tracking	21
8	Index	22

1 (Updated Section) Introduction

The Online Certificate Status Protocol (OCSP) Extensions provide the Microsoft implementation of the Lightweight Online Certificate Status Protocol (OCSP) Profile for High Volume Environments [RFC5019], a profile of the Online Certificate Status Protocol (OCSP) [RFC2560] and any extensions ~~to [RFC5019]. Within this document, the term "this protocol" refers to the Online Certificate Status Protocol (OCSP) Extensions.~~

Familiarity with public key infrastructure (PKI) concepts such as asymmetric and symmetric cryptography, asymmetric and symmetric encryption techniques, digital certificate concepts, and cryptographic key establishment is required for a complete understanding of ~~this protocol.~~ **OCSP Extensions.** [CRYPTO] provides an excellent introduction to cryptography and PKI concepts. [X509] provides an excellent introduction to PKI and certificate concepts.

Sections 1.5, 1.8, 1.9, 2, and 3 of this specification are normative. All other sections and examples in this specification are informative.

1.1 (Updated Section) Glossary

This document uses the following terms:

certificate: A certificate is a collection of attributes and extensions that can be stored persistently. The set of attributes in a certificate can vary depending on the intended usage of the certificate. A certificate securely binds a public key to the entity that holds the corresponding private key. A certificate is commonly used for authentication and secure exchange of information on open networks, such as the Internet, extranets, and intranets. Certificates are digitally signed by the issuing certification authority (CA) and can be issued for a user, a computer, or a service. The most widely accepted format for certificates is defined by the ITU-T X.509 version 3 international standards. For more information about attributes and extensions, see [RFC3280] and [X509] sections 7 and 8.

certificate revocation list (CRL): A list of certificates that have been revoked by the certification authority (CA) that issued them (that have not yet expired of their own accord). The list must be cryptographically signed by the CA that issues it. Typically, the certificates are identified by serial number. In addition to the serial number for the revoked certificates, the CRL contains the revocation reason for each certificate and the time the certificate was revoked. As described in [RFC3280], two types of CRLs commonly exist in the industry. Base CRLs keep a complete list of revoked certificates, while delta CRLs maintain only those certificates that have been revoked since the last issuance of a base CRL. For more information, see [X509] section 7.3, [MSFT-CRL], and [RFC3280] section 5.

certification authority (CA): A third party that issues public key certificates. Certificates serve to bind public keys to a user identity. Each user and certification authority (CA) can decide whether to trust another user or CA for a specific purpose, and whether this trust should be transitive. For more information, see [RFC3280].

key: In cryptography, a generic term used to refer to cryptographic data that is used to initialize a cryptographic algorithm. Keys are also sometimes referred to as keying material.

object identifier (OID): In the context of an object server, a 64-bit number that uniquely identifies an object.

private key: One of a pair of keys used in public-key cryptography. The private key is kept secret and is used to decrypt data that has been encrypted with the corresponding public key. For an introduction to this concept, see [CRYPTO] section 1.8 and [IEEE1363] section 3.1.

public key: One of a pair of keys used in public-key cryptography. The public key is distributed freely and published as part of a digital certificate. For an introduction to this concept, see [CRYPTO] section 1.8 and [IEEE1363] section 3.1.

public key infrastructure (PKI): The laws, policies, standards, and software that regulate or manipulate certificates and public and private keys. In practice, it is a system of digital certificates, certificate authorities (CAs), and other registration authorities that verify and authenticate the validity of each party involved in an electronic transaction. For more information, see [X509] section 6.

registration authority (RA): A generic term for a software module, hardware component, or human operator thereof that enables a user or public key infrastructure (PKI) administrator to perform various administration and operational functions as part of the certification or revocation process.

relying party (RP): The entity (person or computer) using information from a certificate in order to make a security decision. Typically, the RP is responsible for guarding some resource and applying access control policies based on information learned from a certificate.

request: A message from a client to an OCSP responder. The message requests the revocation status of an X.509 certificate (see [RFC2560]).

responder: An OCSP Extensions server that provides OCSP responses (see [RFC2560]).

response: A message from an OCSP responder. The message specifies the status of an X.509 certificate (see [RFC2560]).

revocation: The process of invalidating a certificate. For more details, see [RFC3280] section 3.3.

~~**symmetric encryption:** An encryption method that uses the same cryptographic key to encrypt and decrypt a given message.~~

SHA-1: An algorithm that generates a 160-bit hash value from an arbitrary amount of input data, as described in [RFC3174]. SHA-1 is used with the Digital Signature Algorithm (DSA) in the Digital Signature Standard (DSS), in addition to other algorithms and standards.

trust: To accept another authority's statements for the purposes of authentication and authorization, especially in the case of a relationship between two domains. If domain A trusts domain B, domain A accepts domain B's authentication and authorization statements for principals represented by security principal objects in domain B; for example, the list of groups to which a particular user belongs. As a noun, a trust is the relationship between two domains described in the previous sentence.

MAY, SHOULD, MUST, SHOULD NOT, MUST NOT: These terms (in all caps) are used as defined in [RFC2119]. All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

Links to a document in the Microsoft Open Specifications library point to the correct section in the most recently published version of the referenced document. However, because individual documents in the library are not updated at the same time, the section numbers in the documents may not match. You can confirm the correct section numbering by checking the Errata.

1.2.1 (Updated Section) Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information.

[FIPS140] FIPS PUBS, "Security Requirements for Cryptographic Modules", FIPS PUB 140, December 2002, <https://csrc.nist.gov/csrc/media/publications/fips/140/2/final/documents/fips1402.pdf>

[ITUX690] ITU-T, "ASN.1 Encoding Rules: Specification of Basic Encoding Rules (BER), Canonical Encoding Rules (CER) and Distinguished Encoding Rules (DER)", Recommendation X.690, July 2002, <http://www.itu.int/ITU-T/studygroups/com17/languages/X.690-0207.pdf>

[LWOCSP] Deacon, A. and Hurst, R., "Lightweight OCSP Profile for High Volume Environments", February 2007, <http://tools.ietf.org/html/draft-ietf-pkix-lightweight-ocsp-profile-09>

[MS-CSRA] Microsoft Corporation, "Certificate Services Remote Administration Protocol".

[MS-OCSPA] Microsoft Corporation, "Microsoft OCSP Administration Protocol".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2315] Kaliski, B., "PKCS #7: Cryptographic Message Syntax Version 1.5", RFC 2315, March 1998, <http://www.ietf.org/rfc/rfc2315.txt>

[RFC2560] Myers, M., Ankney, R., Malpani, A., Glasperin, S., and Adams, C., "X.509 Internet Public Key Infrastructure Online Certificate Status Protocol - OCSP", RFC 2560, June 1999, <http://www.ietf.org/rfc/rfc2560.txt>

[RFC2616] Fielding, R., Gettys, J., Mogul, J., et al., "Hypertext Transfer Protocol -- HTTP/1.1", RFC 2616, June 1999, <http://www.rfc-editor.org/rfc/rfc2616.txt>

[RFC2797] Myers, M., Liu, X., Schaad, J., and Weinstein, J., "Certificate Management Messages Over CMS", RFC 2797, April 2000, <http://www.ietf.org/rfc/rfc2797.txt>

[RFC2986] Nystrom, M. and Kaliski, B., "PKCS#10: Certificate Request Syntax Specification", RFC 2986, November 2000, <http://www.ietf.org/rfc/rfc2986.txt>

[RFC3280] Housley, R., Polk, W., Ford, W., and Solo, D., "Internet X.509 Public Key Infrastructure Certificate and Certificate Revocation List (CRL) Profile", RFC 3280, April 2002, <http://www.ietf.org/rfc/rfc3280.txt>

[RFC5019] Deacon, A., and Hurst, R., "The Lightweight Online Certificate Status Protocol (OCSP) Profile for High-Volume Environments", RFC 5019, September 2007, <http://www.ietf.org/rfc/rfc5019.txt>

[X509] ITU-T, "Information Technology - Open Systems Interconnection - The Directory: Public-Key and Attribute Certificate Frameworks", Recommendation X.509, August 2005, <http://www.itu.int/rec/T-REC-X.509/en>

[X660] ITU-T, "Information Technology - Open Systems Interconnection - Procedures for the Operation of OSI Registration Authorities: General Procedures and Top Arcs of the ASN.1 Object Identifier Tree", Recommendation X.660, August 2004, <http://www.itu.int/rec/T-REC-X.660/en>

1.2.2 (Updated Section) Informative References

[CRYPTO] Menezes, A., Vanstone, S., and Oorschot, P., "Handbook of Applied Cryptography", 1997, <http://www.cacr.math.uwaterloo.ca/hac/>

[FIPS140] FIPS PUBS, "Security Requirements for Cryptographic Modules", FIPS PUB 140-2, May 2001, <https://csrc.nist.gov/csrc/media/publications/fips/140/2/final/documents/fips1402.pdf>

[HOWARD] Howard, M., "Writing Secure Code", Microsoft Press, 2002, ISBN: 0735617228.

[RFC2315] Kaliski, B., "PKCS #7: Cryptographic Message Syntax Version 1.5", RFC 2315, March 1998, <https://www.rfc-editor.org/info/rfc2315>

[RFC2797] Myers, M., Liu, X., Schaad, J., and Weinstein, J., "Certificate Management Messages Over CMS", RFC 2797, April 2000, <http://www.rfc-editor.org/info/rfc2797>

[RFC2986] Nystrom, M. and Kaliski, B., "PKCS#10: Certificate Request Syntax Specification", RFC 2986, November 2000, <http://www.rfc-editor.org/info/rfc2986>

1.3 (Updated Section) Overview

The Online Certificate Status Protocol (OCSP), ~~defined~~ described in [RFC2560], provides a mechanism, ~~in lieu of or~~ as a supplement to checking against a periodic certificate revocation list (CRL), to obtain timely information regarding the revocation status of a certificate (see [RFC3280] section 3.3). OCSP enables applications to determine the ~~revocation~~ state of an identified X.509 certificate (see [X509]). The Lightweight Online Certificate Status Protocol (OCSP) Profile for High-Volume Environments ([RFC5019]) provides a profile of OCSP that specifies a subset of the functionality of the complete OCSP defined in [RFC2560]. ~~This protocol~~ OCSP Extensions specifies the data that needs to be exchanged between an application that checks the status of a certificate and the responder that provides the status.

OCSP is a component of a public key infrastructure (PKI). A PKI consists of a system of digital certificates, certification authorities (CAs), and other registration authorities (RAs) that verify and authenticate the validity of each party involved in an electronic transaction through the use of public key cryptography.

The certificate status received as a result of using OCSP is known as a response from an OCSP responder. The OCSP request/response process involves a number of different machines (or functions that might be hosted on the same machine), as indicated in Figure 1.

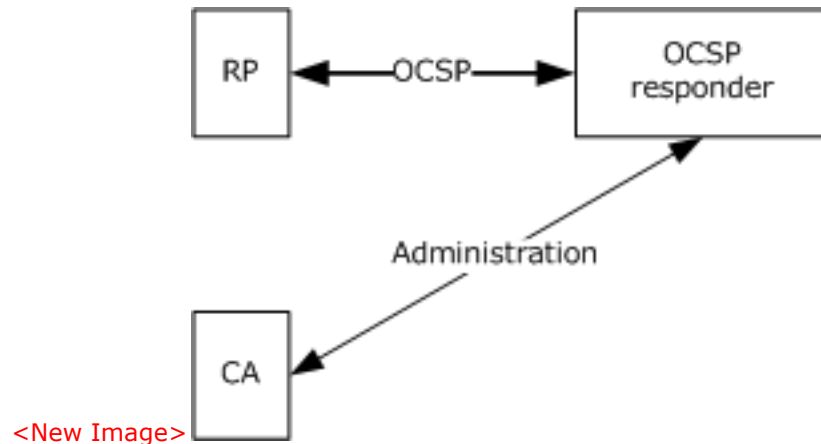


Figure 1: Response from an OCSP

In the preceding figure, the principal components are as follows:

1. **CA:** The ~~CA~~ certification authority that provides certificate status information to the OCSP responder through the use of CRLs.
2. **Relying party (RP):** The resource guard that validates a certificate chain and contacts an OCSP responder to request certificate status.

3. **OCSP responder:** An authoritative source for certificate revocation status (see [RFC3280] section 3.3). The protocols and data structures used for OCSP are defined in section 2.2. The connection over which OCSP is conducted is shown in the preceding figure as a solid bold horizontal line.

1.4 Relationship to Other Protocols

The Hypertext Transfer Protocol (HTTP/1.1) [RFC2616] is the transport protocol for Online Certificate Status Protocol (OCSP) Extensions messages.

1.5 (Updated Section) Prerequisites/Preconditions

~~This protocol~~OCSP Extensions requires HTTP/1.1 ([RFC2616]) for transport of all messages.

~~This protocol~~OCSP Extensions assumes the following:

The client discovers the OCSP Extensions server through the Authority Information Access (AIA) extension that is defined in [RFC3280] section 4.2.2.1 or through a URL configured through out-of-band means.<1>

1.6 (Updated Section) Applicability Statement

~~This protocol~~OCSP Extensions is applicable to an environment in which clients are able to interact with an OCSP responder for the purpose of requesting the revocation status of an [X509] certificate.

1.7 Versioning and Capability Negotiation

None.

1.8 Vendor-Extensible Fields

None.

1.9 Standards Assignments

None.

2 Messages

The following sections specify how messages of the OCSP Extensions are transported and encoded on the wire.

2.1 (Updated Section) Transport

OCSP is commonly used over HTTP [RFC2616], although additional transports are allowed per [RFC2560] section 4.1.<2>

~~This protocol~~OCSP Extensions uses HTTP as the transport.

2.2 (Updated Section) Message Syntax

The following sections define the message syntax for OCSP Extensions. OCSP messages are defined in ASN.1 as ~~described~~specified in [X660] and encoded by using DER encoding as ~~described~~specified in [ITUX690].

2.2.1 (Updated Section) Common Structures

OCSP client and server implementations MUST use the ASN.1 structures specified in [RFC2560] when constructing an OCSP request and response. The following fields are introduced and defined in sections 4.1 and 4.2 of [RFC2560], respectively, and are used by ~~this protocol~~OCSP Extensions.

```
OCSPRequest
  TBSRequest
  OPTIONAL Signature

OCSPResponse
  OCSPResponseStatus
  ResponseBytes
```

Detailed server processing information is in section 3.2

3 Protocol Details

The following sections specify protocol details, including abstract data models and message processing rules.

3.1 Client Details

The client role in OCSP Extensions is to generate a request, as specified in section 2.2.1, and upon receipt, validate the response.

3.1.1 Abstract Data Model

None.

3.1.2 Timers

None.

3.1.3 Initialization

None.

3.1.4 Higher-Layer Triggered Events

None.

3.1.5 Processing Events and Sequencing Rules

OCSP request creation MUST adhere to [RFC5019] section 2.1.<3>

When an OCSP Extensions client processes the response from a responder, it enforces that the response is signed by one of the following keys:

- The private key that was used to sign the inspected certificate.
- A private key with a corresponding certificate that was signed by using the same private key that was used to sign the inspected certificate.

3.1.6 Timer Events

None.

3.1.7 Other Local Events

None.

3.2 Server Details

The following sections define the server sequencing and processing rules for the OCSP implementation.<4>

3.2.1 (Updated Section) Abstract Data Model

This section describes a conceptual model of possible data organization that an implementation can maintain to participate in this protocol. The organization is provided to help explain how the protocol works. This document does not require that implementations adhere to this model, provided their external behavior is consistent with that specified in this document.

The following elements are described by OCSP Extensions.

Revoked Certificates List: The server maintains a list of revoked certificates and maintains the following fields for each revoked certificate:

- Certificate serial number, as specified in [RFC3280] section 4.1.2.2.
- Revocation date and time, as specified in [RFC3280] section 5.3.3.
- Revocation reason, as specified in [RFC3280] section 5.3.1.

OCSP Signing Key Pair: The server maintains a private key with which to sign OCSP responses. The server holds a certificate that has the associated public key, which is delivered to OCSP clients to verify that the server can authorize OCSP responses.

Nonce Policy: The server maintains exactly one variable that is called a Nonce Policy, which can have one of two values: "Allowed" or "Not Allowed". The initial value is "Not Allowed". This variable can be changed directly on the OCSP Extensions server, or it can be changed by using the Microsoft OCSP Administration Protocol, as specified in [MS-OCSPA]. In the Microsoft OCSP Administration Protocol, this variable can be set to "Allowed" by adding the bit value "0x00000100" to the SigningFlags property of the revocation configuration, as documented in [MS-OCSPA] section 3.2.4.1.3.

3.2.2 Timers

None.

3.2.3 Initialization

The responder MUST acquire a certificate as defined in [RFC2560] section 4.2.2.2.

3.2.4 Higher-Layer Triggered Events

None.

3.2.5 (Updated Section) Processing Events and Sequencing Rules

The OCSP Extensions server processes ~~the an~~ OCSP ~~requests~~request and generates ~~the an~~ OCSP response as follows:

1. If the **requestList** field of the request includes more requests than the MaxNumOfRequestEntries property specified in [MS-OCSPA] section 3.2.1.2, ~~<5>~~ the OCSP Extensions responder MUST reject the request with an "unauthorized" response. ~~<5> The unauthorized response is, as~~ specified in [RFC2560] section 2.3.

2. The **CertID.issuerNameHash** and **CertID.issuerKeyHash** values of each request entry included in the **requestList** field of the request MUST be SHA-1 hash values as specified in section 2.1.1 of [RFC5019]. Otherwise, the OCSP Extensions responder MUST reject the request with an "unauthorized" response, as specified in [RFC2560] section 2.3.

While [RFC5019] section 2.1.1 specifies only that "this profile" RECOMMENDS that [the requestExtensions structure] contain only the nonce extension", if the request contains a critical extension that is not the Nonce extension, the OCSF Extensions responder rejects with an "unauthorized" response. The unauthorized response is, as specified in [RFC2560] section 2.3.

~~3. If the request is signed, the OCSF Extensions responder ignores the signature and processes the request as though it were an unsigned request, as specified in [RFC5019] section 2.1.2.~~

4. While [RFC5019] section 2.1.1 specifies only that "this profile" RECOMMENDS that [the requestExtensions structure] contain only the nonce extension", if the request contains a noncritical extension, the OCSF Extensions responder ignores the extension.

5. If the request is signed, the OCSF Extensions responder ignores the signature and processes the request as though it were an unsigned request, as specified in [RFC5019] section 2.1.2.

The **responseType** field for all OCSF responses is id-pkix-ocsp-basic, as defined in [RFC2560] section 4.2.1.

The **responses** field of all responses includes the same number of responses as the number of requests. See step 1 for information about the number of requests.

The Nonce extension that is defined in [RFC2560] section 4.4.1 can be included in requests in the **requestExtensions** field. If the OCSF Extensions responder Nonce Policy is set to "Allowed", the responder includes the Nonce extension in the **responseExtensions** field of the response. If the Nonce Policy is set to "Not Allowed", the responder rejects the request with an "unauthorized" response as specified in [RFC2560] section 2.3.

The OCSF Extensions responder includes a noncritical extension that has an object identifier (OID) of 1.3.6.1.4.1.311.21.4 in the **singleExtensions** field of the response. This field contains the specified OID only if the CA issues a **certificate revocation list (CRL)** that contains the same CRL.Next.Publish extension as specified in [MS-CSRA] section 3.1.2.

The value of the extension referenced above, with an OID of 1.3.6.1.4.1.311.21.4, contains the time when the next revocation information is expected to be published. This time can be sooner than the **NextUpdate** field. The extension value is DER-encoded and is defined in ASN.1 [X509], as the following example shows.

```
CHOICE {
    utcTime      UTCTime,
    generalTime  GeneralizedTime
}
```

If the time is after 1950 and before 2050, it is UTC time that is encoded with a two-digit year. Otherwise, the time is Generalized time that is encoded with a four-digit year. The date is precise to seconds.

The OCSF Extensions responder adds the HTTP headers as specified in [LWOCSP] section 4 for an OCSFResponse.

If the OCSFRequest is preceded by the conditional HTTP headers "If-Modified-Since" or "If-None-Match", the OCSF Extensions responder evaluates whether it has a newer OCSFResponse value (a newer value than what is specified in the condition) for the OCSFRequest value, and responds with an HTTP 304 (not modified) status message if it does not (see [RFC2616]).

With the exception of the deviations and extensions previously enumerated, OCSF request processing and response generation complies with [RFC5019].

3.2.6 Timer Events

None.

3.2.7 Other Local Events

None.

4 Protocol Example

The client determines that it has to validate the revocation status of a certificate. When the client invokes the revocation-checking process, the following event sequence occurs:

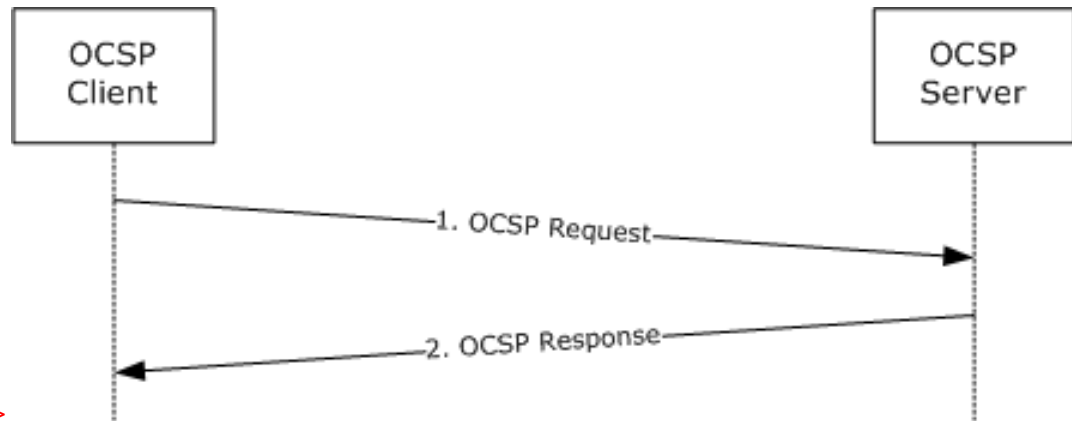


Figure 2: Revocation-checking process

1. The OCSP Extensions client generates an OCSP request as specified in section 3.1.5 and submits the request to the responder.
2. The responder inspects the requests and generates a response as specified in section 3.2.5.

5 Security

The following sections specify security considerations for implementers of the OCSP Extensions.

5.1 (Updated Section) Security Considerations for Implementers

Any cryptographic protocol has security considerations with key handling during cryptographic operations and key distribution. Although a public key certificate is not a protocol by itself, it has most of the same security considerations of a cryptographic protocol in the sense that a public key certificate is a message from the CA to the RP—a message addressed, in effect, "to whom it may concern." A cryptographic protocol that deals with the transmission or issuance or other use of a public key certificate therefore has security considerations in two areas: around the protocol itself and around the certificate and its use.

In addition, a certificate binds two or more pieces of information together. In the most common case, that is a public key and a name. The name in such a certificate has security relevance and there are security considerations around the use and provisioning of those names. In some certificate forms, there are attributes bound to either a name or a key, and there are security considerations regarding the use and provisioning of those attributes.

5.1.1 Keeping Information Secret

Any cryptographic key has to be kept secret. Any function of a secret (such as a key schedule) also has to be kept secret, because knowing such functions would reduce an attacker's work in cryptanalyzing the secret.

When a secret is stored in the normal memory of a general-purpose computer in order to be used, that secret should be erased (for example, replaced with a constant value, such as 0) as soon as possible after use.

A secret can be stored in specially protected memory where it can be used without being erased. Typically, one finds such memory in a hardware security module (HSM). If an HSM is used, it should be compliant with [FIPS140], or the equivalent at a level consistent with the security requirements of the customer deploying the cryptographic protocol or the CA that uses the HSM.

5.1.2 Coding Practices

Any implementation of a protocol exposes code to security attacks. Such code has to be developed according to secure coding and development practices in order to avoid buffer overflows, denial-of-service attacks, escalation of privilege, and disclosure of information. For an introduction to these concepts, secure development best practices, and common errors, see [HOWARD].

5.1.3 (Updated Section) Security Consideration Citations

Implementers of ~~this protocol~~ OCSP Extensions are advised to consider the following security precautions, as OCSP client and server implementations should observe the following:

- Follow generally accepted principles of secure key management. For more information, see [RFC3280] section 9 of [RFC3280]. For an introduction to these generally accepted principles, see [CRYPTO] and [HOWARD].
- Validate cryptographic parameters prior to issuing or accepting certificates. For more information, see section 9 of [RFC2797].
- Validate and verify the certificate path information identified in section 6 of [RFC3280]. See section 9 of [RFC3280] for more information on the requirement for certificate path validation.

- Validate and verify the freshness of revocation information of all digital certificates prior to usage, trust, or encryption as identified in section 6.3 of [RFC3280]. See section 9 of [RFC3280] for more information on the requirement for revocation freshness.
- Follow all security considerations in section 5 of [RFC2560].
- Follow all security considerations discussed throughout [RFC2315] and [RFC2986] as neither normative reference has a specific security section.
- Use an authenticated HTTP session between client and server to mitigate denial-of-service attacks. For more information on generic denial-of-service mitigation techniques, see [HOWARD].

5.2 Index of Security Parameters

None.

6 (Updated Section) Appendix A: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include updates to those products.

The terms "earlier" and "later", when used with a product version, refer to either all preceding versions or all subsequent versions, respectively. The term "through" refers to the inclusive range of versions. Applicable Microsoft products are listed chronologically in this section.

The following tables show the relationships between Microsoft product versions or supplemental software and the roles they perform.

Windows Client Releases	Server Role	Client Role
Windows Vista operating system	NA	Yes
Windows 7 operating system	NA	Yes
Windows 8 operating system	NA	Yes
Windows 8.1 operating system	NA	Yes
Windows 10 operating system	NA	Yes
Windows 11 operating system	NA	Yes

Windows Server Releases	Server Role	Client Role
Windows Server 2008 operating system	Yes	Yes
Windows Server 2008 R2 operating system	Yes	Yes
Windows Server 2012 operating system	Yes	Yes
Windows Server 2012 R2 operating system	Yes	Yes
Windows Server 2016 operating system	Yes	Yes
Windows Server operating system	Yes	Yes
Windows Server 2019 operating system	Yes	Yes
Windows Server 2022 operating system	Yes	Yes

Exceptions, if any, are noted in this section. If an update version, service pack or Knowledge Base (KB) number appears with a product name, the behavior changed in that update. The new behavior also applies to subsequent updates unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms "SHOULD" or "SHOULD NOT" implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term "MAY" implies that the product does not follow the prescription.

<1> Section 1.5: On Windows, only the URL specified in the validated certificate AIA extension is used.

<2> Section 2.1: OCSP Extensions conform to OCSP over HTTP as ~~specified~~described in [RFC2560] Appendix A.

<3> Section 3.1.5: On Windows, OCSP clients generate the OCSP request as follows:

- The version field is set to 1.
- The **requestorName** and **requestExtensions** request fields are not included in the request.
- The requestList always contains only one request.
- The **CertId** field always uses the SHA-1 hash algorithm.
- The OCSP Extensions client does not sign the requests.

<4> Section 3.2: Only Windows Server 2008 and later can perform the server role.

<5> Section 3.2.5: Windows Server ~~2012 R2 and earlier allow~~2008 allows only one request in the **requestList** field.

7 Change Tracking

This section identifies changes that were made to this document since the last release. Changes are classified as Major, Minor, or None.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements.
- A document revision that captures changes to protocol functionality.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **None** means that no new technical changes were introduced. Minor editorial and formatting changes may have been made, but the relevant technical content is identical to the last released version.

The changes made to this document are listed in the following table. For more information, please contact dohelp@microsoft.com.

Section	Description	Revision class
3.2.5 Processing Events and Sequencing Rules	11581 : Added new Step 2 that the server rejects client CertID hash values that are not SHA-1 hash values as required by [RFC5019]. Updated product note in step 1 to Windows Server 2008 allows only one request in the requestList field.	Major

8 Index

A

- Abstract data model
 - client 12
 - server 13
- Applicability 10

C

- Capability negotiation 10
- Change tracking 21
- Citations - security considerations 17
- Client
 - abstract data model 12
 - higher-layer triggered events 12
 - initialization 12
 - local events 12
 - message processing 12
 - other local events 12
 - overview 12
 - sequencing rules 12
 - timer events 12
 - timers 12
- Coding practices – security 17
- Common structures 11
- Common Structures message 11

D

- Data model - abstract
 - client 12
 - server 13

E

- Example 16

F

- Fields - vendor-extensible 10

G

- Glossary 6

H

- Higher-layer triggered events
 - client 12
 - server 13

I

- Implementer - security considerations 17
- Index of security parameters 18
- Informative references 8
- Initialization
 - client 12
 - server 13
- Introduction 6

L

Local events
 client 12
 server 15

M

Message processing
 client 12
 server 13
Messages
 Common Structures 11
 overview 11
 syntax 11
 transport 11

N

Normative references 7

O

Other local events
 client 12
 server 15
Overview (synopsis) 9

P

Parameters - security index 18
Preconditions 10
Prerequisites 10
Product behavior 19
Protocol Details
 overview 12

R

References 7
 informative 8
 normative 7
Relationship to other protocols 10

S

Secret information 17
Security
 implementer considerations 17
 overview 17
 parameter index 18
Sequencing rules
 client 12
 server 13
Server
 abstract data model 13
 higher-layer triggered events 13
 initialization 13
 local events 15
 message processing 13
 other local events 15
 overview 12
 sequencing rules 13
 timer events 15

- timers 13
- Standards assignments 10
- Structures 11
- Syntax - message 11

T

- Timer events
 - client 12
 - server 15
- Timers
 - client 12
 - server 13
- Tracking changes 21
- Transport 11
- Transport - message 11
- Triggered events - higher-layer
 - client 12
 - server 13

V

- Vendor-extensible fields 10
- Versioning 10