

[MS-PCCRD-Diff]:

Peer Content Caching and Retrieval: Discovery Protocol

Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation (~~“this documentation”~~) for protocols, file formats, data portability, computer languages, and standards as well as overviews of the interaction among each of these technologiessupport. Additionally, overview documents cover inter-protocol relationships and interactions.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you maycan make copies of it in order to develop implementations of the technologies that are described in ~~the Open Specifications~~this documentation and maycan distribute portions of it in your implementations usingthat use these technologies or in your documentation as necessary to properly document the implementation. You maycan also distribute in your implementation, with or without modification, any ~~schema, IDL's~~schemas, IDLs, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications-documentation.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that maymight cover your implementations of the technologies described in the Open Specifications-documentation. Neither this notice nor Microsoft's delivery of ~~the~~this documentation grants any licenses under those patents or any other Microsoft patents. However, a given Open ~~Specification may~~Specifications document might be covered by the Microsoft Open Specifications Promise or the Microsoft Community Promise. If you would prefer a written license, or if the technologies described in ~~the Open Specifications~~this documentation are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting iplg@microsoft.com.
- **Trademarks.** The names of companies and products contained in this documentation maymight be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit www.microsoft.com/trademarks.
- **Fictitious Names.** The example companies, organizations, products, domain names, ~~e-mail~~email addresses, logos, people, places, and events that are depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than as specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications ~~documentation~~ does not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments, you are free to take advantage of them. Certain Open Specifications documents are intended for use in conjunction with publicly available ~~standard~~standards specifications and network programming art, ~~and~~assumes, as such, assume that the reader either is familiar with the aforementioned material or has immediate access to it.

Revision Summary

Date	Revision History	Revision Class	Comments
12/5/2008	0.1	Major	Initial Availability
1/16/2009	0.1.1	Editorial	Changed language and formatting in the technical content.
2/27/2009	0.2	Minor	Clarified the meaning of the technical content.
4/10/2009	0.3	Minor	Clarified the meaning of the technical content.
5/22/2009	0.4	Minor	Clarified the meaning of the technical content.
7/2/2009	1.0	Major	Updated and revised the technical content.
8/14/2009	1.0.1	Editorial	Changed language and formatting in the technical content.
9/25/2009	1.1	Minor	Clarified the meaning of the technical content.
11/6/2009	2.0	Major	Updated and revised the technical content.
12/18/2009	2.0.1	Editorial	Changed language and formatting in the technical content.
1/29/2010	2.1	Minor	Clarified the meaning of the technical content.
3/12/2010	3.0	Major	Updated and revised the technical content.
4/23/2010	3.1	Minor	Clarified the meaning of the technical content.
6/4/2010	4.0	Major	Updated and revised the technical content.
7/16/2010	4.0	None	No changes to the meaning, language, or formatting of the technical content.
8/27/2010	4.0	None	No changes to the meaning, language, or formatting of the technical content.
10/8/2010	4.0	None	No changes to the meaning, language, or formatting of the technical content.
11/19/2010	4.0	None	No changes to the meaning, language, or formatting of the technical content.
1/7/2011	4.0	None	No changes to the meaning, language, or formatting of the technical content.
2/11/2011	4.0	None	No changes to the meaning, language, or formatting of the technical content.
3/25/2011	4.0	None	No changes to the meaning, language, or formatting of the technical content.
5/6/2011	4.0	None	No changes to the meaning, language, or formatting of the technical content.
6/17/2011	4.1	Minor	Clarified the meaning of the technical content.
9/23/2011	4.1	None	No changes to the meaning, language, or formatting of the technical content.
12/16/2011	5.0	Major	Updated and revised the technical content.

Date	Revision History	Revision Class	Comments
3/30/2012	6.0	Major	Updated and revised the technical content.
7/12/2012	7.0	Major	Updated and revised the technical content.
10/25/2012	8.0	Major	Updated and revised the technical content.
1/31/2013	8.0	None	No changes to the meaning, language, or formatting of the technical content.
8/8/2013	9.0	Major	Updated and revised the technical content.
11/14/2013	9.0	None	No changes to the meaning, language, or formatting of the technical content.
2/13/2014	9.0	None	No changes to the meaning, language, or formatting of the technical content.
5/15/2014	9.0	None	No changes to the meaning, language, or formatting of the technical content.
6/30/2015	10.0	Major	Significantly changed the technical content.
10/16/2015	10.0	No ChangeNone	No changes to the meaning, language, or formatting of the technical content.

Table of Contents

1	Introduction	6
1.1	Glossary	6
1.2	References	8
1.2.1	Normative References	8
1.2.2	Informative References	9
1.3	Overview	9
1.4	Relationship to Other Protocols	9
1.5	Prerequisites/Preconditions	9
1.6	Applicability Statement	10
1.7	Versioning and Capability Negotiation	10
1.8	Vendor-Extensible Fields	10
1.9	Standards Assignments.....	10
2	Messages.....	11
2.1	Transport	11
2.2	Common Message Syntax	11
2.2.1	Namespaces	11
2.2.2	Messages.....	11
2.2.2.1	Probe	12
2.2.2.2	ProbeMatch	12
2.2.3	Elements	14
2.2.3.1	Types	14
2.2.3.2	Scopes 1.....	14
2.2.3.3	Scopes 2.....	15
2.2.3.4	Address	15
2.2.3.5	MetadataVersion	16
2.2.3.6	InstanceId	16
2.2.3.7	MessageNumber	16
2.2.3.8	XAddr	16
2.2.3.9	Any	16
2.2.4	Complex Types.....	17
2.2.5	Simple Types	17
2.2.6	Attributes	17
2.2.7	Groups	17
2.2.8	Attribute Groups.....	17
3	Protocol Details.....	18
3.1	Client Details	18
3.1.1	Abstract Data Model.....	18
3.1.2	Timers	18
3.1.3	Initialization	18
3.1.4	Message Processing Events and Sequencing Rules	18
3.1.4.1	Receive ProbeMatch	19
3.1.5	Timer Events.....	19
3.1.6	Other Local Events.....	19
3.1.6.1	Discovery Probe Started	19
3.2	Server Details.....	19
3.2.1	Abstract Data Model.....	19
3.2.2	Timers	19
3.2.3	Initialization	20
3.2.4	Message Processing Events and Sequencing Rules	20
3.2.4.1	Receive Probe.....	20
3.2.5	Timer Events.....	20
3.2.6	Other Local Events.....	20
3.2.6.1	Segment ID Added or Removed	20

4	Protocol Examples	21
4.1	Version 1.0 Probe Message	21
4.2	Version 2.0 Probe Message	21
4.3	Version 1.0 ProbeMatch Message	22
4.4	Version 2.0 ProbeMatch Message	23
5	Security	25
5.1	Security Considerations for Implementers	25
5.2	Index of Security Parameters	25
6	Appendix A: Full WSDL	26
7	Appendix B: Product Behavior	27
8	Change Tracking	29
9	Index	30

1 Introduction

The Peer Content Caching and Retrieval: Discovery Protocol is a **content** caching and retrieval framework based on a **peer**-to-peer discovery and distribution model. This protocol is designed to reduce bandwidth consumption on branch-office wide-area-network (WAN) links by having **clients** retrieve content from distributed caches, when distributed caches are available, rather than from the **content servers**, which are often located remotely from branch offices over the WAN links. The peers themselves act as caches from which they serve other requesting peers. The main benefit is to reduce operation costs by reducing WAN link utilization, while providing faster downloads from the **local area network (LAN)** in the branch office.

The Discovery Protocol in the framework is utilized by peers adopting the client role to discover content among other peers. It is based on the Web Service Dynamic Discovery Protocol (also called WSD) [WS-Discovery] standard, with no changes in its protocol syntax and behaviors. Therefore, this document refers to [WS-Discovery] for the detailed specification but provides the product-specific message formats and describes how the Discovery Protocol fits into the overall framework.

Sections 1.5, 1.8, 1.9, 2, and 3 of this specification are normative ~~and can contain the terms MAY, SHOULD, MUST, MUST NOT, and SHOULD NOT as defined in [RFC2119]. Sections 1.5 and 1.9 are also normative but do not contain these terms.~~ All other sections and examples in this specification are informative.

1.1 Glossary

~~The~~This document uses the following terms ~~are specific to this document:~~

block: A chunk of **content** that composes a **segment**. Each **segment** is divided into one or more **blocks**. Every **block** belongs to a specific **segment**, and within a **segment**, **blocks** are identified by their progressive index. (Block 0 is the first **block** in the **segment**, block 1 is the second, and so on.) See [MS-PCCRC] for more details.

client: For the Peer Content Caching and Retrieval Framework, a client is a client-role peer; that is, a peer that is searching for content, either from the server or from other peers or hosted caches. In the context of the Retrieval Protocol, a client is a peer that requests a block-range from a server_role_peer. It acts as a Web Services Dynamic Discovery (WS-Discovery) [WS-Discovery] client.

content: Items that correspond to a file that an application attempts to access. Examples of **content** include web pages and documents stored on either HTTP servers or SMB file servers. Each **content** item consists of an ordered collection of one or more **segments**.

content server: The original server that a **peer** contacts to obtain either the hashes of the **content** or the actual **content** when it is not available from the **peers**.

Coordinated Universal Time (UTC): A high-precision atomic time standard that approximately tracks Universal Time (UT). It is the basis for legal, civil time all over the Earth. Time zones around the world are expressed as positive and negative offsets from UTC. In this role, it is also referred to as Zulu time (Z) and Greenwich Mean Time (GMT). In these specifications, all references to UTC refer to the time at UTC-0 (or GMT).

globally unique identifier (GUID): A term used interchangeably with universally unique identifier (UUID) in Microsoft protocol technical documents (TDs). Interchanging the usage of these terms does not imply or require a specific algorithm or mechanism to generate the value. Specifically, the use of this term does not imply or require that the algorithms described in [RFC4122] or [C706] must be used for generating the **GUID**. See also universally unique identifier (UUID).

HoHoDk: A hash that represents the content-specific label or public identifier that is used to discover **content** from other **peers** or from the hosted cache. This identifier is disclosed freely in broadcast messages. Knowledge of this identifier does not prove authorization to access the actual **content**.

local area network (LAN): A group of computers and other devices dispersed over a relatively limited area and connected by a communications link that enables any device to interact with any other device on the network.

peer: A node participating in the content caching and retrieval system. A peer is a node that both accesses the content and serves the content it caches for other peers.

probe: The Web Services Dynamic Discovery (WS-Discovery) protocol message sent by a **client** to discover **content**, as defined in [WS-Discovery1.1].

ProbeMatch: The WSD protocol message sent by a server peer to the requesting **client** when it has the **content** the **client** is looking for.

segment: A unit of content for discovery purposes. A segment is identified on the network by its public identifier, also known as segment ID or HoHoDk. A segment does not belong to any particular content; it can be shared by many content items if all those content items have an identical segment-sized portion at some offset.

segment ID (HoHoDk): A hash that represents the content-specific label or public identifier that is used to discover content from other peers or from the hosted cache. This identifier is disclosed freely in broadcast messages. Knowledge of this identifier does not prove authorization to access the actual content.

server peer: A **peer** that has the **content** in its local cache and that will serve the **content** to other **peers** requesting it. A **server peer** is acting as a WSD server or service target in the Discovery Protocol.

SOAP: A lightweight protocol for exchanging structured information in a decentralized, distributed environment. **SOAP** uses XML technologies to define an extensible messaging framework, which provides a message construct that can be exchanged over a variety of underlying protocols. The framework has been designed to be independent of any particular programming model and other implementation-specific semantics. SOAP 1.2 supersedes SOAP 1.1. See [SOAP1.2-1/2003].

Uniform Resource Identifier (URI): A string that identifies a resource. The URI is an addressing mechanism defined in Internet Engineering Task Force (IETF) Uniform Resource Identifier (URI): Generic Syntax [RFC3986].

Web Services Description Language (WSDL): An XML format for describing network services as a set of endpoints that operate on messages that contain either document-oriented or procedure-oriented information. The operations and messages are described abstractly and are bound to a concrete network protocol and message format in order to define an endpoint. Related concrete endpoints are combined into abstract endpoints, which describe a network service. WSDL is extensible, which allows the description of endpoints and their messages regardless of the message formats or network protocols that are used.

WSDL message: An abstract, typed definition of the data that is communicated during a **WSDL operation** [WSDL]. Also, an element that describes the data being exchanged between web service providers and clients.

WSDL operation: A single action or function of a web service. The execution of a WSDL operation typically requires the exchange of messages between the service requestor and the service provider.

XML namespace: A collection of names that is used to identify elements, types, and attributes in XML documents identified in a URI reference [RFC3986]. A combination of XML namespace and local name allows XML documents to use elements, types, and attributes that have the same names but come from different sources. For more information, see [XMLNS-2ED].

XML schema: A description of a type of XML document that is typically expressed in terms of constraints on the structure and content of documents of that type, in addition to the basic syntax constraints that are imposed by XML itself. An XML schema provides a view of a document type at a relatively high level of abstraction.

XML Schema (XSD): A language that defines the elements, attributes, namespaces, and data types for XML documents as defined by [XMLSCHEMA1/2] and [W3C-XSD] standards. An XML schema uses XML syntax for its language.

MAY, SHOULD, MUST, SHOULD NOT, MUST NOT: These terms (in all caps) are used as defined in [RFC2119]. All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

Links to a document in the Microsoft Open Specifications library point to the correct section in the most recently published version of the referenced document. However, because individual documents in the library are not updated at the same time, the section numbers in the documents may not match. You can confirm the correct section numbering by checking the Errata.

1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information.

[MS-PCCRC] Microsoft Corporation, "Peer Content Caching and Retrieval: Content Identification".

[MS-PCCRR] Microsoft Corporation, "Peer Content Caching and Retrieval: Retrieval Protocol".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC3986] Berners-Lee, T., Fielding, R., and Masinter, L., "Uniform Resource Identifier (URI): Generic Syntax", STD 66, RFC 3986, January 2005, <http://www.ietf.org/rfc/rfc3986.txt>

[RFC768] Postel, J., "User Datagram Protocol", STD 6, RFC 768, August 1980, <http://www.ietf.org/rfc/rfc768.txt>

[SOAP-UDP] Combs, H., Justice, J., Kakivaya, G., et al., "SOAP-over-UDP", September 2004, <http://specs.xmlsoap.org/ws/2004/09/soap-over-udp/soap-over-udp.pdf>

[SOAP1.2-1/2003] Gudgin, M., Hadley, M., Mendelsohn, N., et al., "SOAP Version 1.2 Part 1: Messaging Framework", W3C Recommendation, June 2003, <http://www.w3.org/TR/2003/REC-soap12-part1-20030624>

[WS-Discovery] Beatty, J., Kakivaya, G., Kemp D., et al., "Web Services Dynamic Discovery (WS-Discovery)", April 2005, <http://specs.xmlsoap.org/ws/2005/04/discovery/ws-discovery.pdf>

[WSDL] Christensen, E., Curbera, F., Meredith, G., and Weerawarana, S., "Web Services Description Language (WSDL) 1.1", W3C Note, March 2001, <http://www.w3.org/TR/2001/NOTE-wsdl-20010315>

[XMLNS] Bray, T., Hollander, D., Layman, A., et al., Eds., "Namespaces in XML 1.0 (Third Edition)", W3C Recommendation, December 2009, <http://www.w3.org/TR/2009/REC-xml-names-20091208/>

[XMLSCHEMA1.1/2:2008] Peterson, D., Biron, P.V., Malhotra, A., et al., Eds., "W3C XML Schema Definition Language (XSD) 1.1 Part 2: Datatypes", W3C Working Draft, June 2008, <http://www.w3.org/TR/2008/WD-xmlschema11-2-20080620/>

1.2.2 Informative References

[WS-Addr-Core] World Wide Web Consortium, "Web Services Addressing 1.0 - Core", W3C Recommendation, May 2006, <http://www.w3.org/TR/ws-addr-core/>

1.3 Overview

The Peer Content Caching and Retrieval Discovery Protocol is based on the Web Services Dynamic Discovery protocol, defined in [WS-Discovery], which uses multicast to discover and locate services over the network. There are two modes of operations in WSD: client-initiated **Probes** and service-initiated announcements; both are sent through IP multicast to a predefined group. The Peer Content Caching and Retrieval Discovery Protocol uses the client-initiated Probes to query peer nodes for content.

In the Peer Content Caching and Retrieval Discovery Protocol, the peers looking for content are the WSD clients, sending out multicast WSD Probe messages with the hashes of the content. The peers that are serving the content take the server role of WSD, listening to Probes and replying to the querying clients with unicast **ProbeMatch** messages if the content hashes match the ones that are cached locally. To avoid the situation where multiple **server peers** overwhelm a client with ProbeMatch messages, per the WS-Discovery protocol, each server peer ~~must wait~~ waits for a backoff timer to expire before sending the ProbeMatch. The value of the backoff timer is set randomly between 1 millisecond and a maximum backoff time.

1.4 Relationship to Other Protocols

The Discovery Protocol uses the Web Services Dynamic Discovery protocol, specified in [WS-Discovery], which uses **SOAP**-over-UDP [SOAP-UDP] [RFC768] as its network transport. In the Windows Peer Content Caching and Retrieval framework, the Discovery Protocol is used by the Peer Content Caching and Retrieval: Retrieval Protocol [MS-PCCRR] to discover other peers that have particular **segments** of content.

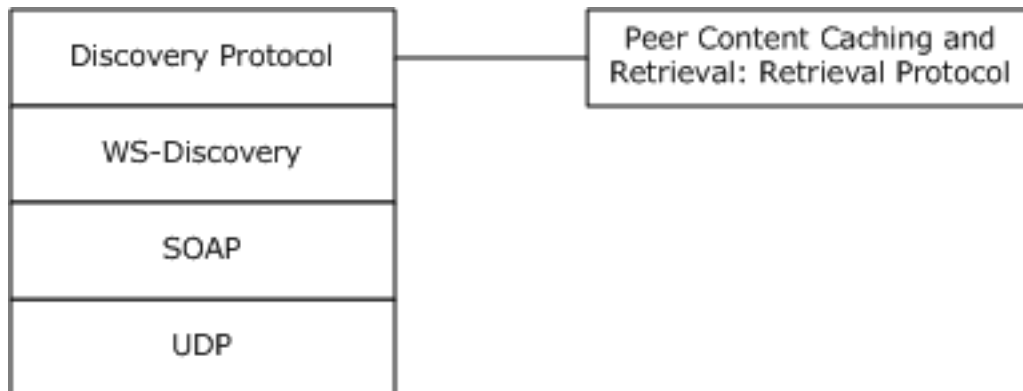


Figure 1: Layering of the protocol stack

1.5 Prerequisites/Preconditions

This protocol depends on the Web Services Dynamic Discovery protocol specified in [WS-Discovery]. The client requesting the discovery is required to have the content information, defined in the Content Information Specification [MS-PCCRC], for the content that it is looking for, and the peers answering

the request are required to have a (possibly empty) cache of content that they can check to see if they have the requested content stored locally in order to answer a query.

1.6 Applicability Statement

A client uses the Discovery Protocol to locate peers with the content it requires, in the context of the Peer Content Caching and Retrieval Framework. The protocol is thus appropriate (only) in settings where multiple peers and at least one content server support this framework. It is particularly applicable in cases where the content server is available only over a relatively high-latency or low-bandwidth connection whereas the peers are available over relatively higher-bandwidth, lower-latency ones. In that case, the framework, including this Discovery Protocol, offers the possibility of significant performance benefits.

The Discovery Protocol is used to find peers with the hashes listed in the Probe messages. It is not for discovering hashes for given names or URLs. It is necessary for the clients to contact the original content servers (as opposed to the peer caches) to obtain the Content Information data structure (see [MS-PCCRC]) containing hashes corresponding to the contents.

1.7 Versioning and Capability Negotiation

The Discovery Protocol is based on the WSD standard and does not define any new mechanisms for the following areas:

- Supported transports
- Protocol versions
- Security and authentication methods
- Localization
- Capability negotiation

This document defines version 2.0 of the discovery protocol, which preserves the messages from version 1.0 and allows for efficient discovery of multiple segments. Capability negotiation is achieved using standard fields of the Web Services Dynamic Discovery (WS-Discovery) protocol.

1.8 Vendor-Extensible Fields

None.

1.9 Standards Assignments

None.

2 Messages

2.1 Transport

The Discovery Protocol uses the Web Services Dynamic Discovery protocol, specified in [WS-Discovery], and the actual transport protocol is abstracted by WSD. The Discovery Protocol simply uses WSD with certain elements set to custom values and relies on WSD for the actual transport of the Receive Probe (section 3.2.4.1) and Receive ProbeMatch (section 3.1.4.1) messages. <1>

2.2 Common Message Syntax

This section contains common definitions used by this protocol. The syntax of the definitions uses **XML schema** as defined in [XMLSCHEMA1.1/2:2008], and **Web Services Description Language (WSDL)** as defined in [WSDL].

Finally, unless specified otherwise, all 2-byte and 4-byte integer fields are defined in network byte order.

2.2.1 Namespaces

This specification defines and references various **XML namespaces** using the mechanisms specified in [XMLNS]. Although this specification associates a specific XML namespace prefix for each XML namespace that is used, the choice of any particular XML namespace prefix is implementation-specific and is not significant for interoperability.

Because the Discovery Protocol uses the WSD Protocol [WS-Discovery], the namespace requirement will be a subset of the WSD namespaces.

Prefix	Namespace URI	Reference
soap	http://www.w3.org/2003/05/soap-envelope	[SOAP1.2-1/2003]
wsa	http://schemas.xmlsoap.org/ws/2004/08/addressing	[WS-Addr-Core]
wsd	http://schemas.xmlsoap.org/ws/2005/04/discovery	[WS-Discovery]
PeerD ist	http://schemas.microsoft.com/p2p/2007/09/PeerDistributionDiscovery	This documentSection_39a50fa1e4d645298c711c867ffbe314

The XML namespace **URI** that MUST be used by the implementation of the Discovery Protocol is:

<http://schemas.microsoft.com/p2p/2007/09/PeerDistributionDiscovery>

Note The preceding URI does not contain any schema definition. It is used merely as a tag to identify the namespace. All elements related to the preceding namespaces are defined in this document.

2.2.2 Messages

The following table summarizes the set of common **WSDL messages** defined by this specification. WSDL message definitions that are specific to a particular operation are described with the operation.

Any: The <Any> element embedded as <PeerDist:PeerDistData>, as specified in section 2.2.3.9.

2.2.3 Elements

The following table summarizes the set of common XML schema elements defined by this specification. XML schema element definitions that are specific to a particular message are described with the message.

Element	Description
<Types>	Represents the list of discovery provider types.
<Scopes>	Represents the list of discovery provider scopes.
<Address>	Identifies the responding device.
<MetadataVersion>	Identifies the current metadata version.
<InstanceId>	Identifies the current instance of the device being published. This element is part of the SOAP protocol header.
<MessageNumber>	Identifies the counter within the scope of the instance identifier for the current message. This element is part of the SOAP protocol header.
<XAddr>	Contains the list of transport URIs supported by the peer responding to the Probe message (with a ProbeMatch message).
<Any>	Version 1.0: Used to indicate how many blocks in each discovered segment are available. Version 2.0: Used to indicate the ages of the discovered segments.

2.2.3.1 Types

The <Types> element represents the list of discovery provider types. When specified in the request message, the value indicates the Types to be searched for. When specified in the response, the value provides the Types that were found. The value of the element is set to indicate that the Probe and ProbeMatch messages were sent by the Windows Peer Content Caching and Retrieval framework so that it can be checked on the receiving side to confirm this. This element **MUST** be set to:

Version 1.0 <Types> Element

```
PeerDist:PeerDistData
```

Version 2.0 <Types> Element

```
PeerDist:PeerDistDataV2
```

2.2.3.2 Scopes 1

The <Scopes> element represents the list of discovery provider scopes, where each element in the list is a string.

When specified in the request message, the peer **MUST** populate this value to indicate the segments it is searching for. When sending the response, the value provides the list of scopes present in the cache.

Each element in the list is actually a UTF-8-encoded string representation of the HoHoDk value in hexBinary format [XMLSCHEMA1.1/2:2008] and represents one segment. (For details of HoHoDk, refer to [MS-PCCRC].) The Discovery Protocol uses the case-sensitive string comparison rule defined as part of the WSD standard schemas. Refer to [WS-Discovery] section 5.1 for details.

2.2.3.3 Scopes 2

The <Scopes> element represents the list of discovery provider scopes, where each element in the list is a string.

Version 1.0 <Scope> Element

When specified in the request message, the version 1.0 peer MUST populate this value to indicate the segments it is searching for. When sending the response, the value provides the list of scopes present in the cache.

Each element in the list is actually a UTF-8-encoded string representation of the HoHoDk value in hexBinary format [XMLSCHEMA1.1/2:2008] and represents one segment. (For details of HoHoDk, refer to [MS-PCCRC].) The Discovery Protocol uses the case-sensitive string comparison rule defined as part of the WSD standard schemas. Refer to [WS-Discovery] section 5.1 for details.

Version 2.0 <Scope> Element

When specified in the request message, the version 2.0 peer MUST populate this value with a single scope string to indicate the segments it is searching for. The scope string is a UTF-8 encoded string representation in base64Binary format [XMLSCHEMA1.1/2:2008]. The format of the scope string is as follows:

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	
SegmentHashSize																Segment Hash Count						HoHoDk (variable)										
...																																

SegmentHashSize (2 bytes): Size of Segment Hash in bytes

Segment Hash Count (1 byte): Number of Segment Hashes present in the string

HoHoDk (variable): List of HoHoDk(s)

Version 2.0 <Scope> element on ProbeMatch message

The <Scope> element of the ProbeMatch message is used to indicate segment availability. This field contains a base64 representation of a bit array encoded as a UTF-8 string. The availability of each HoHoDk is indicated by a two-bit array. The most significant bit in each two-bit array MUST be set to 1 if the responding peer has the requested segment in its cache, and must be set to 0 if the responding peer does not have the segment in its cache. The least significant bit MUST be set to 1 if the responding peer has all blocks belonging to the segment in its cache, and MUST be set to 0 if the responding peer does not have all blocks belonging to the segment in its cache.

2.2.3.4 Address

The <Address> element identifies the responding device. It MUST be set to a **globally unique identifier (GUID)** as a "uuid:" scheme URI.<3> The <Address> element is a child element of the <EndpointReference> element. Refer to [WS-Discovery] for the detailed definitions of Address and the "uuid:" scheme URI. The following line shows an example of the Address identifier.

2.2.3.5 MetadataVersion

The <MetadataVersion> element is the current metadata version and MUST be set to 1<4> or 2.<5>

2.2.3.6 InstanceId

The <InstanceId> element is the identifier for the current instance of the device being published. It MUST be generated at run time when the service starts and MUST be incremented whenever the service is restarted. The recommendations on the initial value and processing rules of the InstanceId are specified in [WS-Discovery], Appendix I – Application Sequencing.<6>

2.2.3.7 MessageNumber

The <MessageNumber> element is the counter within the scope of the instance identifier for the current message. This MUST be generated at run time, and the MessageNumber MUST be incremented for each message. The MessageNumber of the first message sent within the scope of the current InstanceID SHOULD be "1". Note that the InstanceID and the use and increment of the same MessageNumber apply to other message types defined in [WS-Discovery] that the applications using the Discovery Protocol **may can** send, not just the ProbeMatch message defined in the Discovery Protocol. The rules on initializing, processing, and incrementing the MessageNumber are specified in [WS-Discovery], Appendix I – Application Sequencing.

2.2.3.8 XAddrs

The <XAddrs> element contains the list of transport URIs supported by the peer responding to the Probe message (with a ProbeMatch message). Each transport URI string MUST contain an address and port number that can be used for connection by a remote host. For detailed format specifications on transport URIs containing IP addresses and port numbers, see [RFC3986].

2.2.3.9 Any

Version 1.0 <Any> element

A custom XML section MUST be embedded in the <Any> element of the WSD message body.

This field is used to indicate how many blocks in each discovered segment are available. The XML MUST be formatted as follows:

```
<PeerDist:PeerDistData>
  <PeerDist:BlockCount>
    List of block counts
  </PeerDist:BlockCount>
</PeerDist:PeerDistData>
```

PeerDistData: This element encloses all the custom metadata for Version 1.0 responses.

BlockCount: This element is a child of the <PeerDistData> element. This element is set to the UTF-8-encoded string representation of the hexBinary [XMLSCHEMA1.1/2:2008] packed array of integers in network byte order. Each integer represents a block count. For example, if there are three block counts with the decimal values 25, 4, and 16, the hexBinary value of these block counts is 001900040010, corresponding to the three segments discovered.

Version 2.0 <Any> element

This field is used to indicate the ages for the discovered segments. The XML MUST be formatted as follows:

```
<PeerDist:PeerDistData>
  <PeerDist: SegmentAges>
    List of Segment Ages
  </PeerDist:SegmentAges>
</PeerDist:PeerDistData>
```

PeerDistData: This element encloses all custom metadata for Version 2.0 responses.

SegmentAges: This element is a child of the <PeerDistData> element. This field contains a base 64 representation of a bit array encoded as a UTF-8 string. For more details about the format of the SegmentAges field, see [MS-PCCRR].

2.2.4 Complex Types

This specification does not define any common **XML Schema** complex type definitions.

2.2.5 Simple Types

This specification does not define any common XML Schema simple type definitions.

2.2.6 Attributes

This specification does not define any common XML Schema attribute definitions.

2.2.7 Groups

This specification does not define any common XML Schema group definitions.

2.2.8 Attribute Groups

This specification does not define any common XML Schema attribute group definitions.

3 Protocol Details

The Discovery Protocol utilizes the Probe and ProbeMatch messages from the WSD Protocol. Refer to [WS-Discovery] for the detailed protocol operation. This section describes how the Probe and ProbeMatch messages are used in the Discovery Protocol.

3.1 Client Details

3.1.1 Abstract Data Model

This section describes a conceptual model of possible data organization that an implementation maintains to participate in this protocol. The described organization is provided to facilitate the explanation of how the protocol behaves. This document does not mandate that implementations adhere to this model as long as their external behavior is consistent with that described in this document.

The following is a list of the abstract data model elements for the protocol state on the client or the requesting peer:

HoHoDk List: A list of the **segment IDs/HoHoDks** of the segments that the peer is searching for.

Outstanding Probe List: A list of currently outstanding Probes, together with the HoHoDks contained in them.

APP_MAX_DELAY: The maximum time a server peer can wait before sending a ProbeMatch message.

3.1.2 Timers

The client peer **MUST** set a request timer when sending a Probe message to wait for a certain period of time for the incoming replies. The request timer is configurable such that system administrators can adjust the value based on their current network environments. The default value of the request timer is in the range of 200 milliseconds to 500 milliseconds, and under all circumstances, the waiting period **SHOULD NOT** be smaller than the maximum backoff timer value as defined in section 3.2.2 to ensure that enough replies are received by a requesting peer. When the request timer expires on a requesting peer without receiving any ProbeMatch replies, the implementation **MUST** remove that Probe message and its associated **HoHoDk List** from the **Outstanding Probe List**.

3.1.3 Initialization

The elements for the Probe message **MUST** be initialized according to their corresponding values or rules, as specified in section 2.2.2.1.

The **HoHoDk List** (or **segment ID** list) on the requesting peer **MUST** be initialized with values supplied by applications using the Discovery Protocol. This list consists of the HoHoDks passed by the applications through the interface of the Discovery Protocol as specified in section 1.4.

3.1.4 Message Processing Events and Sequencing Rules

The following table summarizes the list of client **WSDL operations** as defined by this specification.

Operation	Description
Receive ProbeMatch	Triggered by the WSD layer on receiving a response to a Probe message.

3.1.4.1 Receive ProbeMatch

This event is triggered by the WSD layer on receiving a response to a Probe as specified in section 3.2.4.1. The peer that receives a ProbeMatch message MUST check the <Types> and <XAddrs> elements to verify that the response was sent by a peer on the local subnet, and it MUST check the HoHoDks to verify that at least one is associated with a Probe message on the **Outstanding Probe List**. If so, it MUST report the IP address and the port number from the <XAddrs> element of the ProbeMatch message and the relevant HoHoDk from the <Scopes> element of the ProbeMatch message to the higher layer.

All malformed ProbeMatch messages MUST be silently discarded.

3.1.5 Timer Events

When the request timer for a specific Probe message expires on the requesting peer, that Probe message and its associated **HoHoDk List** are removed from the **Outstanding Probe List**.

3.1.6 Other Local Events

All malformed messages destined for the Peer Content Caching and Retrieval framework MUST be silently discarded. All WSD messages destined for other services will be dispatched by the WSD service to other registered components for the specific service types. For general WSD message processing and error handling, refer to [WS-Discovery].

3.1.6.1 Discovery Probe Started

To start a Discovery Probe, the higher layer passes one or more segment HoHoDks from the content it is looking for to the client-role peer, which sends out a WSD Probe message that is modified, as specified in section 2.2.2.1. It then adds the Probe together with its HoHoDks to the **Outstanding Probe List** and sets the request timer for this Probe.

3.2 Server Details

3.2.1 Abstract Data Model

This section describes a conceptual model of possible data organization that an implementation maintains to participate in this protocol. The described organization is provided to facilitate the explanation of how the protocol behaves. This document does not mandate that implementations adhere to this model as long as their external behavior is consistent with that described in this document.

The following abstract data model is required on the server peer:

Available Segment List: A list of all HoHoDks for all available segments, and their corresponding block counts.

3.2.2 Timers

The server peer MUST set a backoff timer (defined and explained in [WS-Discovery]) randomly between 1 millisecond and a maximum value (defined by the WSD Protocol constant **APP_MAX_DELAY**). If the server peer has the requested segment ID(s) in the request, the server MUST send the ProbeMatch message back to the requesting peer when the backoff timer expires. If the server peer does not have the requested segment ID(s), the server MUST ignore the request. For

a detailed description of the backoff timer, see [WS-Discovery]. This timer is configurable such that system administrators can adjust the value based on their current network environments. By default, **APP_MAX_DELAY** SHOULD be set to 65 milliseconds.<7>

3.2.3 Initialization

The server peers MUST initialize an empty **Available Segment List** and populate the list with the HoHoDks supplied by the higher-layer applications of the Discovery Protocol. The server peers MUST also generate and set the initial values for Address (section 2.2.3.4), InstanceId (section 2.2.3.6), and MessageNumber (section 2.2.3.7).

3.2.4 Message Processing Events and Sequencing Rules

The following table summarizes the list of server WSDL operations as defined by this specification.

Operation	Description
Receive Probe	Triggered by the WSD layer on receiving a Probe message.

3.2.4.1 Receive Probe

This event is triggered by the WSD layer on receiving a Probe message. The event processing involves checking the <Types> and <Scopes> elements to verify that the Probe was initiated by a peer. The peer then SHOULD respond to the Probe if one or more HoHoDks in the Probe match any that are stored locally.<8>

If none of the HoHoDks stored locally match the ones in the Probe message, the Probe message MUST be silently discarded.

If the peer responds to the Probe, it MUST first retrieve the corresponding block counts for the stored segments whose HoHoDks match the ones in the Probe message. It MUST then construct and send the ProbeMatch message (as defined in section 2.2.2.2) back to the requesting peer, using the correct block counts.

All malformed Probe messages MUST be silently discarded. A Probe having an empty or an incorrectly formatted <Scope> element is considered as a malformed Probe message.

3.2.5 Timer Events

The behavior of the backoff timer is described in [WS-Discovery].

3.2.6 Other Local Events

All malformed messages destined for the Windows Peer Content Caching and Retrieval framework MUST be silently discarded. All WSD messages destined for other services will be dispatched by the WSD service to other registered components for the specific service types. For general WSD message processing and error handling, refer to [WS-Discovery].

3.2.6.1 Segment ID Added or Removed

When the higher-layer protocol or applications of the Discovery Protocol add or remove a segment ID/HoHoDk, the server peer MUST update its **Available Segment List** accordingly, with the updated segment IDs supplied by the higher-layer protocol or application.


```

    </wsa:MessageID>
  </soap:Header>
  <soap:Body>
    <wsd:Probe>
      <wsd:Types>
        PeerDist:PeerDistDataV2
      </wsd:Types>
      <wsd:Scopes
        MatchBy=
          "http://schemas.microsoft.com/p2p/2010/05/PeerDistV2MatchingRule">
ACACI74aAQAAAAwHRoBAAAAAEEAQBEAHkAZwBNAE0AMQAJvhoBAAAAADAdGgEAAAAAQBBAEQAeQBnAE0ATQAxAA==
      </wsd:Scopes>
    </wsd:Probe>
  </soap:Body>
</soap:Envelope>

```

The <scopes> element in this example contains the following values:

```

Segment Hash Size = 32 Bytes
Segment Hash Count = 2
HoHoDK 1 = 23BE1A0100000000301D1A0100000000410041004400790067004D004D003100
HoHoDK 2 = 23BE1A0100000000301D1A0100000000410041004400790067004D004D003100

```

Other peer nodes that receive this Probe message check whether the HoHoDKs in the Probe identify a segment at least some blocks of which are available locally. If a match is found, the node sets a backoff timer and replies with the ProbeMatch message after the timer expires, as described in section 4.3 for version 1.0 and 4.4 for version 2.0.

4.3 Version 1.0 ProbeMatch Message

Version 1.0 ProbeMatch message

```

<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:soap=http://www.w3.org/2003/05/soap-envelope
  xmlns:wsa="http://schemas.xmlsoap.org/ws/2004/08/addressing"
  xmlns:wsd="http://schemas.xmlsoap.org/ws/2005/04/discovery"
  xmlns:PeerDist=
    "http://schemas.microsoft.com/p2p/2007/09/PeerDistributionDiscovery"
  >
  <soap:Header>
    <wsa:To>
      http://schemas.xmlsoap.org/ws/2004/08/addressing/role/anonymous
    </wsa:To>
    <wsa:Action>
      http://schemas.xmlsoap.org/ws/2005/04/discovery/ProbeMatches
    </wsa:Action>
    <wsa:MessageID>
      urn:uuid:7f4b09a3-96c9-4170-9eb3-1c805a52f444
    </wsa:MessageID>
    <wsa:RelatesTo>
      urn:uuid:91528b47-b96d-4e30-981f-308c0586926f
    </wsa:RelatesTo>
    <wsd:AppSequence InstanceId="1218765447" MessageNumber="4"/>
  </soap:Header>
  <soap:Body>
    <wsd:ProbeMatches>
      <wsd:ProbeMatch>
        <wsa:EndpointReference>
          <wsa:Address>
            urn:uuid:87A89944-0230-43a5-AC4E-FAB1386C8E2C
          </wsa:Address>
        </wsa:EndpointReference>
        <wsd:Types>
          PeerDist:PeerDistData
        </wsd:Types>
      </wsd:ProbeMatch>
    </wsd:ProbeMatches>
  </soap:Body>
</soap:Envelope>

```



```
<wsd:XAddr>
  157.59.141.183:54321
</wsd:XAddr>
<wsd:MetadataVersion>
  2
</wsd:MetadataVersion>
<PeerDist:PeerDistData>
  <PeerDist:SegmentAges>
    AAEDAgBg6gACYOoA
  </PeerDist:SegmentAges>
</PeerDist:PeerDistData>
</wsd:ProbeMatch>
</wsd:ProbeMatches>
</soap:Body>
</soap:Envelope>
```

The <Scopes> element in this example indicates the availability of 40 complete segments. The <PeerDist:SegmentAges> element indicates ages for segments 1 and 3.

5 Security

The WSD messages are multicast on the local subnet. Because the Discovery Protocol works on top of the Web Services Dynamic Discovery Protocol specified in [WS-Discovery], it leverages the security model of WSD. In addition, the Discovery Protocol rejects responses from any subnet other than the local subnet. For more information about the security model of WSD, see [WS-Discovery].

5.1 Security Considerations for Implementers

None.

5.2 Index of Security Parameters

None.

6 Appendix A: Full WSDL

This protocol follows the Web Services Dynamic Discovery protocol specified in [WS-Discovery]. Its Web Services Description Language [WSDL] is identical to that of WS-Discovery.

7 Appendix B: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs.

~~Note: Some of the information in this section is subject to change because it applies to a preliminary product version, and thus may differ from the final version of the software when released. All behavior notes that pertain to the preliminary product version contain specific references to it as an aid to the reader.~~

- Windows Vista operating system
- Windows Server 2008 operating system
- Windows 7 operating system
- Windows Server 2008 R2 operating system
- Windows 8 operating system
- Windows Server 2012 operating system
- Windows 8.1 operating system
- Windows Server 2012 R2 operating system
- Windows 10 operating system
- Windows Server 2016 ~~Technical Preview~~ operating system

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

<1> Section 2.1: For Windows Vista and Windows Server 2008, support for the client-side elements of this protocol is available only via the optional installation of the Background Intelligent Transfer Service by way of the Windows Management Framework. Support for the server-side elements of this protocol is not available for Windows Vista or Windows Server 2008.

<2> Section 2.2.2: Version 2.0 of the Content Information structure is not supported by Windows 7 and Windows Server 2008 R2.

<3> Section 2.2.3.4: The Windows implementation generates a new GUID for the URI when the service starts.

<4> Section 2.2.3.5: MetadataVersion MUST be set to 1 for Windows Vista, Windows Server 2008, Windows 7, and Windows Server 2008 R2.

<5> Section 2.2.3.5: MetadataVersion MUST be set to 2 for Windows 8, Windows Server 2012, Windows 8.1, Windows Server 2012 R2, Windows 10, and Windows Server 2016 ~~Technical Preview~~.

<6> Section 2.2.3.6: In Windows 7 and Windows Server 2008 R2 operating system, the InstanceId is generated by taking the boot time of the service in seconds since 1970-01-01 Time 00:00:00 **UTC**.

<7> Section 3.2.2: In Windows 7 and Windows Server 2008 R2, the default value for the request timer is 300 milliseconds, and the default maximum backoff timer value on the server peer is 65 milliseconds. However, these two values are configurable in Windows 7 and Windows Server 2008 R2 and can be set by system administrators based on the specific network environment.

<8> Section 3.2.4.1: In Windows 7 and Windows Server 2008 R2, the following rules are used to determine whether a server peer will reply to a Probe message when it has the requested segment.

When the server peer first requests and downloads a segment as a client, it records the number of replies it receives and whether the replies contain the entire segment or just a portion of the segment. Later, when the server peer receives a Probe message for that segment, it proceeds as follows (where n is an administratively configurable parameter with the default value $n = 10$):

- If there were fewer than n replies, the server peer will respond to the new Probe after the backoff timer expires.
- If there were at least n replies:
 - If there were at least n full-segment replies, the server peer will not reply to the new Probe.
 - If there were fewer than n full-segment replies, the server peer will randomly determine whether to reply to the new Probe, with a probability of 0.33 for replying.

8 Change Tracking

No table of changes is available. The document is either new or has had no changes since its last release.

9 Index

A

- Abstract data model
 - client 18
 - server 19
- Address element 15
- Any element 16
- Applicability 10
- Attribute groups 17
- Attributes 17

C

- Capability negotiation 10
- Change tracking 29
- Client
 - abstract data model 18
 - initialization 18
 - local events 19
 - discovery probe 19
 - overview 19
 - message processing 18
 - overview 18
 - ProbeMatch message - receive 19
 - sequencing rules 18
 - timer events 19
 - timers 18
- Complex types 17

D

- Data model - abstract
 - client 18
 - server 19

E

- Elements
 - Address 15
 - Any 16
 - InstanceId 16
 - MessageNumber 16
 - MetadataVersion 16
 - Scopes 1 14
 - Scopes 2 15
 - Types 14
 - XAddr 16
- Events
 - local
 - client
 - discovery probe 19
 - overview 19
 - server
 - overview 20
 - segment ID 20
 - local - client 19
 - local - server 20
 - timer
 - client 19
 - server 20
 - timer - client 19
 - timer - server 20

Examples

- version 1.0 Probe message 21
 - version 1.0 ProbeMatch message 22
 - version 2.0 Probe message 21
 - version 2.0 ProbeMatch message 23
- Examples - overview 21

F

- Fields - vendor-extensible 10
- Full WSDL 26

G

- Glossary 6
- Groups 17

I

- Implementer - security considerations 25
- Index of security parameters 25
- Informative references 9
- Initialization
 - client 18
 - server 20
- InstanceId element 16
- Introduction 6

L

- Local events
 - client 19
 - discovery probe 19
 - overview 19
 - server 20
 - overview 20
 - segment ID 20

M

- Message processing
 - client 18
 - server 20
- MessageNumber element 16
- Messages
 - Address element 15
 - Any element 16
 - attribute groups 17
 - attributes 17
 - complex types 17
 - elements 14
 - enumerated 11
 - groups 17
 - InstanceId element 16
 - MessageNumber element 16
 - MetadataVersion element 16
 - namespaces 11
 - Probe 12
 - Probe message 12
 - ProbeMatch 12
 - ProbeMatch message 12
 - Scopes 1 element 14
 - Scopes 2 element 15
 - simple types 17

- syntax 11
- transport 11
- Types element 14
- XAddr element 16
- MetadataVersion element 16

N

- Namespaces 11
- Normative references 8

O

- Operations
 - Receive Probe 20
- Overview (synopsis) 9

P

- Parameters - security index 25
- Preconditions 9
- Prerequisites 9
- Probe message
 - overview 12
 - receive 20
 - version 1.0 example 21
 - version 2.0 example 21
- ProbeMatch message
 - overview 12
 - receive 19
 - version 1.0 example 22
 - version 2.0 example 23
- Product behavior 27
- Protocol Details
 - overview 18

R

- References 8
 - informative 9
 - normative 8
- Relationship to other protocols 9

S

- Scopes 1 element 14
- Scopes 2 element 15
- Scopes packet 15
- Security
 - implementer considerations 25
 - overview 25
 - parameter index 25
- Sequencing rules
 - client 18
 - server 20
- Server
 - abstract data model 19
 - initialization 20
 - local events 20
 - overview 20
 - segment ID 20
 - message processing 20
 - overview 18
 - Probe message - receive 20

- Receive Probe operation 20
 - sequencing rules 20
 - timer events 20
 - timers 19
- Simple types 17
- Standards assignments 10
- Syntax
 - messages - overview 11
- Syntax - messages - overview 11

T

- Timer events
 - client 19
 - server 20
- Timers
 - client 18
 - server 19
- Tracking changes 29
- Transport 11
- Types
 - complex 17
 - simple 17
- Types element 14

V

- Vendor-extensible fields 10
- Versioning 10

W

- WSDL 26

X

- XAddrs element 16